

# Exchange 2013: POP3

## Logging

Das Logging wird mittels des folgenden Befehls aktiviert (Exchange Management Shell):

```
Set-PopSettings -Server "Exchange-Server" -protocolLogEnabled $false
```


Überprüfung erfolgt über den Befehl:

```
Get-PopSettings | format-list
```

Der Standard-Pfad ist folgender:

C:\Program Files\Microsoft\Exchange Server\V15\Logging\Pop3Logging

## Event 1011: status has changed to false

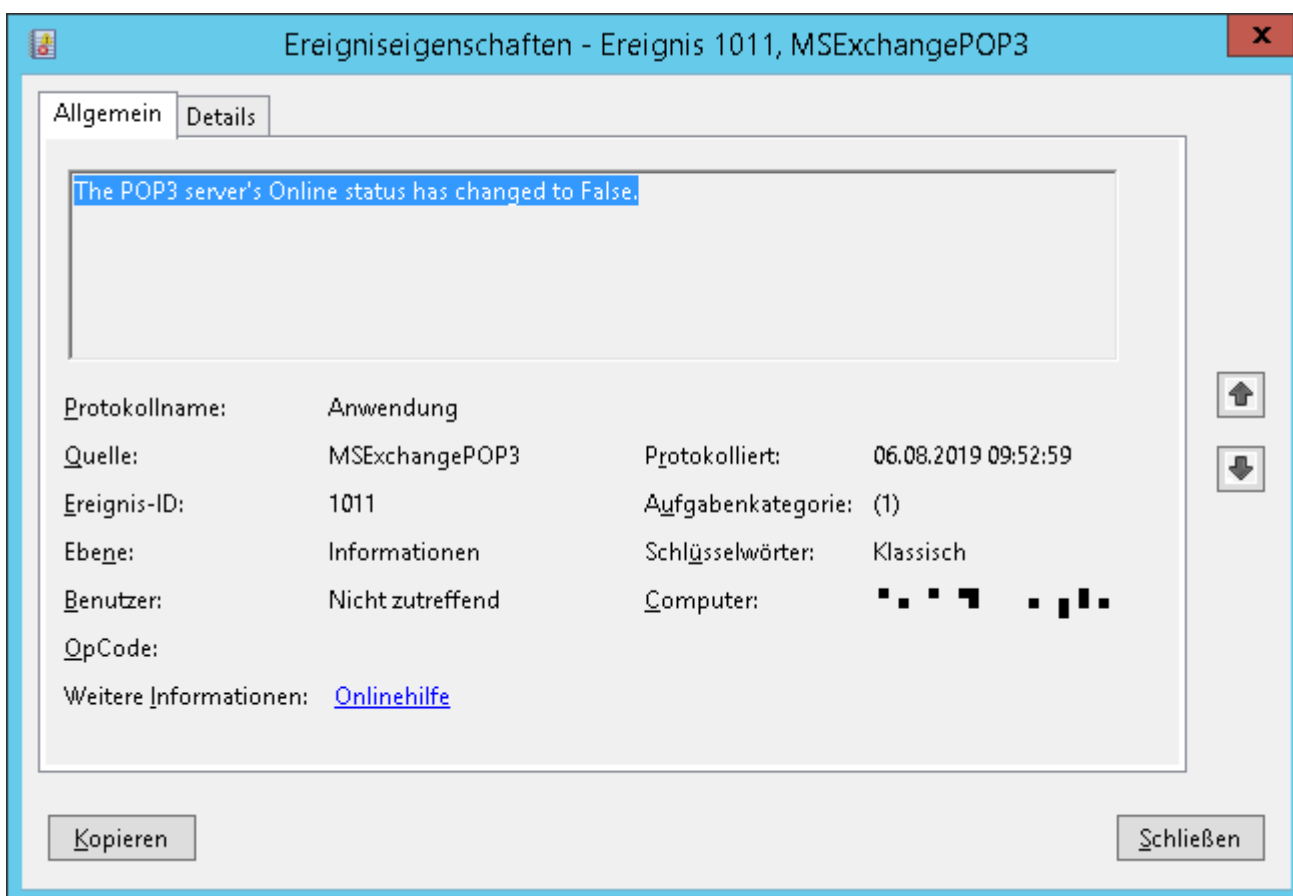

Bitte prüfen, ob der POP-Proxy des Exchange läuft (Exchange Management Shell):

```
Get-ServerComponentState -Identity Exchange-Server
```

Server State	Component
Exchange-Server.mydomain.local Active	ServerWideOffline
Exchange-Server.mydomain.local Active	HubTransport
Exchange-Server.mydomain.local Active	FrontendTransport
Exchange-Server.mydomain.local Active	Monitoring
Exchange-Server.mydomain.local Active	RecoveryActionsEnabled
Exchange-Server.mydomain.local Active	AutoDiscoverProxy
Exchange-Server.mydomain.local Active	ActiveSyncProxy
Exchange-Server.mydomain.local Active	EcpProxy
Exchange-Server.mydomain.local Active	EwsProxy
Exchange-Server.mydomain.local Active	ImapProxy
Exchange-Server.mydomain.local Active	OabProxy
Exchange-Server.mydomain.local Active	OwaProxy
Exchange-Server.mydomain.local Inactive	PopProxy
Exchange-Server.mydomain.local Active	PushNotificationsProxy
Exchange-Server.mydomain.local Active	RpsProxy
Exchange-Server.mydomain.local Active	RwsProxy
Exchange-Server.mydomain.local Active	RpcProxy
Exchange-Server.mydomain.local Active	UMCallRouter
Exchange-Server.mydomain.local Active	XropProxy
Exchange-Server.mydomain.local Active	HttpProxyAvailabilityGroup
Exchange-Server.mydomain.local Inactive	ForwardSyncDaemon
Exchange-Server.mydomain.local Inactive	ProvisioningRps
Exchange-Server.mydomain.local Active	MapiProxy
Exchange-Server.mydomain.local	EdgeTransport

```
Active
Exchange-Server.mydomain.local           HighAvailability
Active
Exchange-Server.mydomain.local           SharedCache
Active
```

Läuft der Proxy nicht, kann er mit Hilfe dieses Befehls wieder aktiviert werden:

```
Set-ServerComponentState -Identity Exchange-Server -Component PopProxy -
Requester HealthAPI -State Active
```

From:  
<https://wiki.sebastianhetzel.net/> - **Sebastians IT-Wiki**

Permanent link:  
[https://wiki.sebastianhetzel.net/exch:2013\\_pop3](https://wiki.sebastianhetzel.net/exch:2013_pop3)

Last update: **2019/08/06 12:45**

